


BARBER
ENGINEERING COMPANY

**Barber...
Better Built**

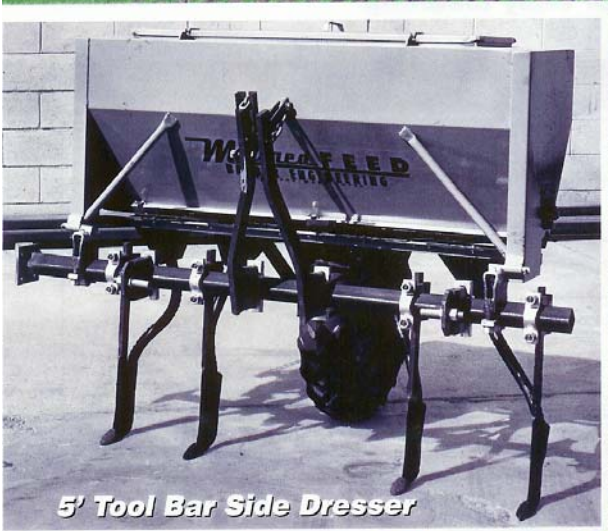

Side Dressers

Metered Feed Side Dressers

- **Metered feed measures fertilizer accurately**
- **Fertilizer flow stops and starts with the spreader**
- **Easily adjusted for different row spacings**
- **Remove catch pans and shanks to broadcast**
- **Agitator breaks up lumpy material but does not pulverize pellets**
- **Machine can be cleaned and reassembled in a few minutes**
- **Entire bottom can be removed for easy cleaning**

Hopper Specifications

	5'	12'
Weight (lbs)	300	750
Height	52"	52"
Length	5'6"	12'6"
Width	42"	42"
Hopper Capacity (lbs)	700	1,700
Recommended Tire Size	6.70 x 15	6.70 x 15

Hopper Material

14 gauge mild or #304 stainless steel

Drive System

Ground wheel drive

Standard Features

Stainless steel housings, waterproof lids, agitator shields, 3 point hitch, catch pans and tubes, set of calibration sprockets

Optional Features

Custom lengths, tool bar, tool bar clamps, A-frame, fertilizer shanks, chemical feed screw, adjustable wheel spacing on 5' side dresser

Barber Engineering Company manufactures dry fertilizer spreaders and nurse boxes. Strict adherence to original Barber designs and quality workmanship make the products you receive the finest available.

Additionally, replacement parts are manufactured by Barber and are usually in stock and ready for immediate shipment.

Specifications subject to change without notice.



1404 N. Regal • Spokane, WA 99202

(509) 535-3051

Fax (509) 534-6231