

**BARBER ENGINEERING**  
**REAR MOUNT DRILL FILL**



**Compatible with Most Roll Tarps**

**Hydraulic Fold for Easy Operation and Compact Transport**

**Designed for Tandem Axle Trucks - Easy Installation and Removal**

**Ground Level Controls Including Electric On/Off Switch**

**Handles Both Fertilizer and Grain**

**BARBER ENGINEERING**

Spokane, WA

## SPECIFICATIONS

Auger Size .....	8'
Overall Length .....	14' 6"
Top Section .....	8' 6"
Bottom Section .....	6'
Height with Bed Lowered .....	14'
Height with Bed Raised .....	11' at 25°, 10' at 30°, 8' at 40°
Weight .....	400 lbs
Distance from Side of Truck .....	4'
Downspout Length .....	10'



Note: Above measurements based on truck with 56" bed height.

**Standard** .... Hydraulic fold, electrically controlled auger, 3 section downspout  
Pressure Hoses are not included.

**Options** ..... Custom lengths, stainless steel construction, brush augers

### Truck Requirements

- \_\_\_ Tandem Axle Truck with maximum of 39" from center of pivot to end of bed.
- \_\_\_ Selector valve may be required for truck hydraulics to power Drill Fill.
- \_\_\_ Pump 12-14 GPM at 2000 PSI
- \_\_\_ 39" Minimum side board height
- \_\_\_ 95" Minimum bed width

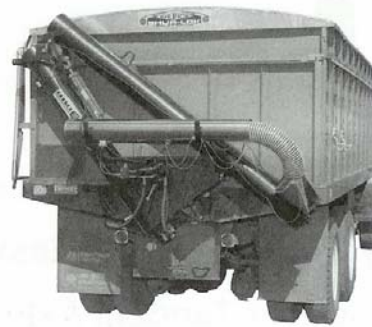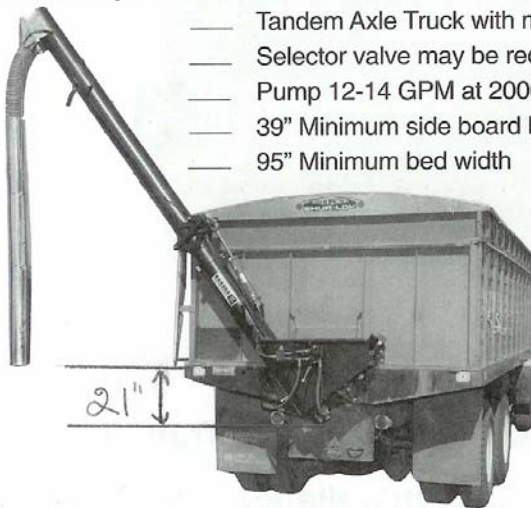

# BARBER ENGINEERING

Spokane, WA

PHONE (509) 535-3051

FAX (509) 534-6231

PRICE AND MACHINE REVISIONS SUBJECT TO CHANGE WITHOUT NOTICE