Double Hopper Nurse Box

- Side discharge one-piece folding auger
- Choose mild or stainless steel welded design
- Mild steel unit has powder coated finish
- Easily handles fertilizer, grain and seed products
- Choose from frame or flatbed mount

Specifications 16' 20'

Hopper Dimensions	16' x 96"	20' x 96"
Overall Height	82" Frame Mount 88" Flat Bed Mount	82" Frame Mount 88" Flat Bed Mount
Weight (lbs)	4230	5290
Hopper Capacity (cu ft)	500	640
Auger Dimensions	10" x 16'	10" x 18'
Discharge Height (from box frame)	9' 4"	10' 7"
Raised Auger Overhang	16' auger - 8' 11" 18' auger - 10' 5"	16' auger - 8' 11" 18' auger - 10' 5"
Lowered Auger Overhang	16' auger - 2' 18' auger - 4'	16' auger - 0' 18' auger - 2'

Hopper Material 12 gauge mild or #304 stainless steel

Drive System Truck hydraulics or self contained hydraulic system including 25HP gas engine,

oil tank and battery

Standard Features Vinyl tarp, tarp tie-downs, ladder, three section stainless steel downspout, two

compartment hopper, fenders on frame mount, stainless steel gates, gate guides,

hopper bottom and auger cleanout gate

Optional Features Four compartments and manual or electric roll tarp

Barber Engineering Company manufactures dry fertilizer spreaders and nurse boxes. Strict adherence to original Barber designs and quality workmanship make the products you receive the finest available.


Additionally, replacement parts are manufactured by Barber and are usually in stock and ready for immediate shipment.

Specifications subject to change without notice.



1404 N. Regal • Spokane, WA 99202 (509) 535-3051

Fax (509) 534-6231

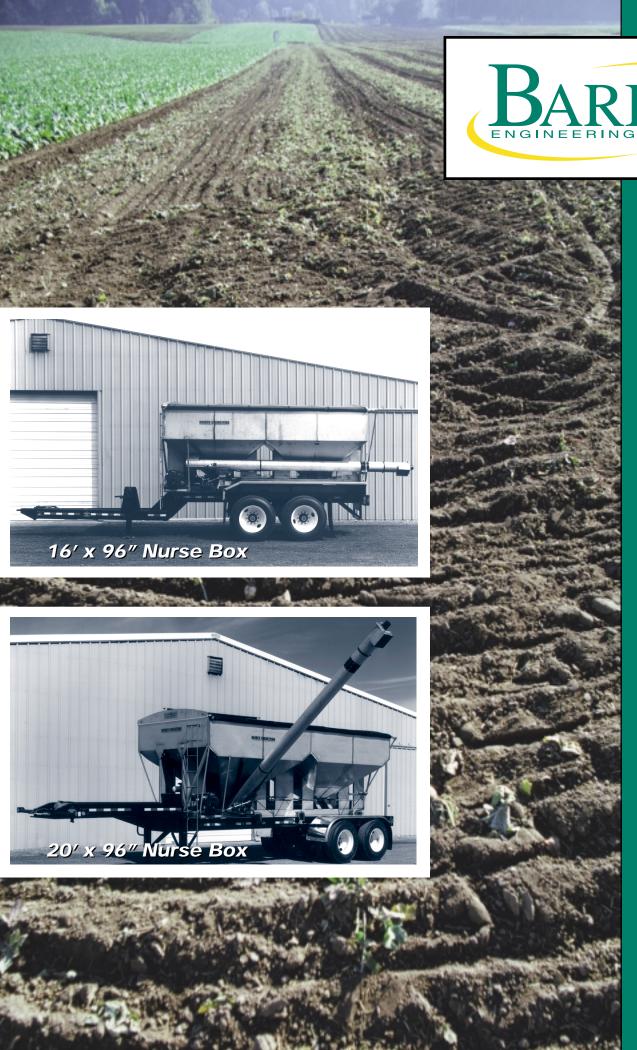

Barber... Better Built

Nurse Boxes